SPECIFICATIONS

	PLP-4/4		PLP-5/5	
Capacity	2500 kg/5,000 lb	5,000 kg/10,000 lb	2,500 kg/5,000 lb	5,000 kg/10,000 lb
Platform dimensions	1.20 m X 1.20m X 0.075m / 47" x 47" x 3" IN		1.50 m X 1.50m X 0.07 m / 59" x 59" x 3" IN	
Steel	Available			
Stainless steel platform	Available			
Totally stainless	Available	Not Available	Available	Not available
Maximum tare	1,250 kg/2,500 lb	2,500 kg/5,000 lb	1,250 kg/2,500 lb	2,500 kg/5,000 lb
Operation temperature	-10 to 40°C (14 to 104°F)			
Storage temperature	-20 to 50°C (-4 to 122 °F)			

SHIPPING WEIGHTS

	PLP-4/4	PLP-4/4 AI	PLP-4/4 W	PLP-5/5	PLP-5/5 AI	PLP-5/5 W
Net weight	150 kg/330.8 lb	200kg / 441 lb	200kg / 441 lb	180 kg / 397 lb	220 kg / 485 lb	220 kg / 485 lb
Shipping weight	170 kg/ 375 lb	220 kg / 485 lb	220 kg / 485 lb	200 kg / 441 lb	240 kg / 529 lb	240 kg / 529 lb

OPTIONAL ACCESORIES
- Access ramps

DIMENSIONS

PLP-4 x 4



PLP-4 x 4 with access ramps



PLP-5 x 5



PLP-5 x 5 with access ramps

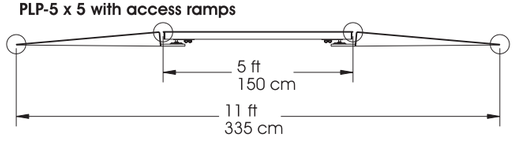

Why buying a PLP at TORREY?

Because its low profile:
Makes installation very easy.

Because its rugged construction
They are designed for heavy duty jobs
and long lasting life.

Because we have a wide variety:
TORREY offers a wide variety of platforms, where you can find the appropriate one for your business

NOM

DISTRIBUTED BY

ALL INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTICE

TORREY®

LOW PROFILE PLATFORMS

PLP MODEL

Industry and factories in general
Warehouses
Markets
Small business
Shipping companies
Supermarkets
Hardware shop
Stationer's & Printing houses
Customs
Workshops
Steel dealers
Aluminum and steel foundries
Buying and Selling retraining material
etc.

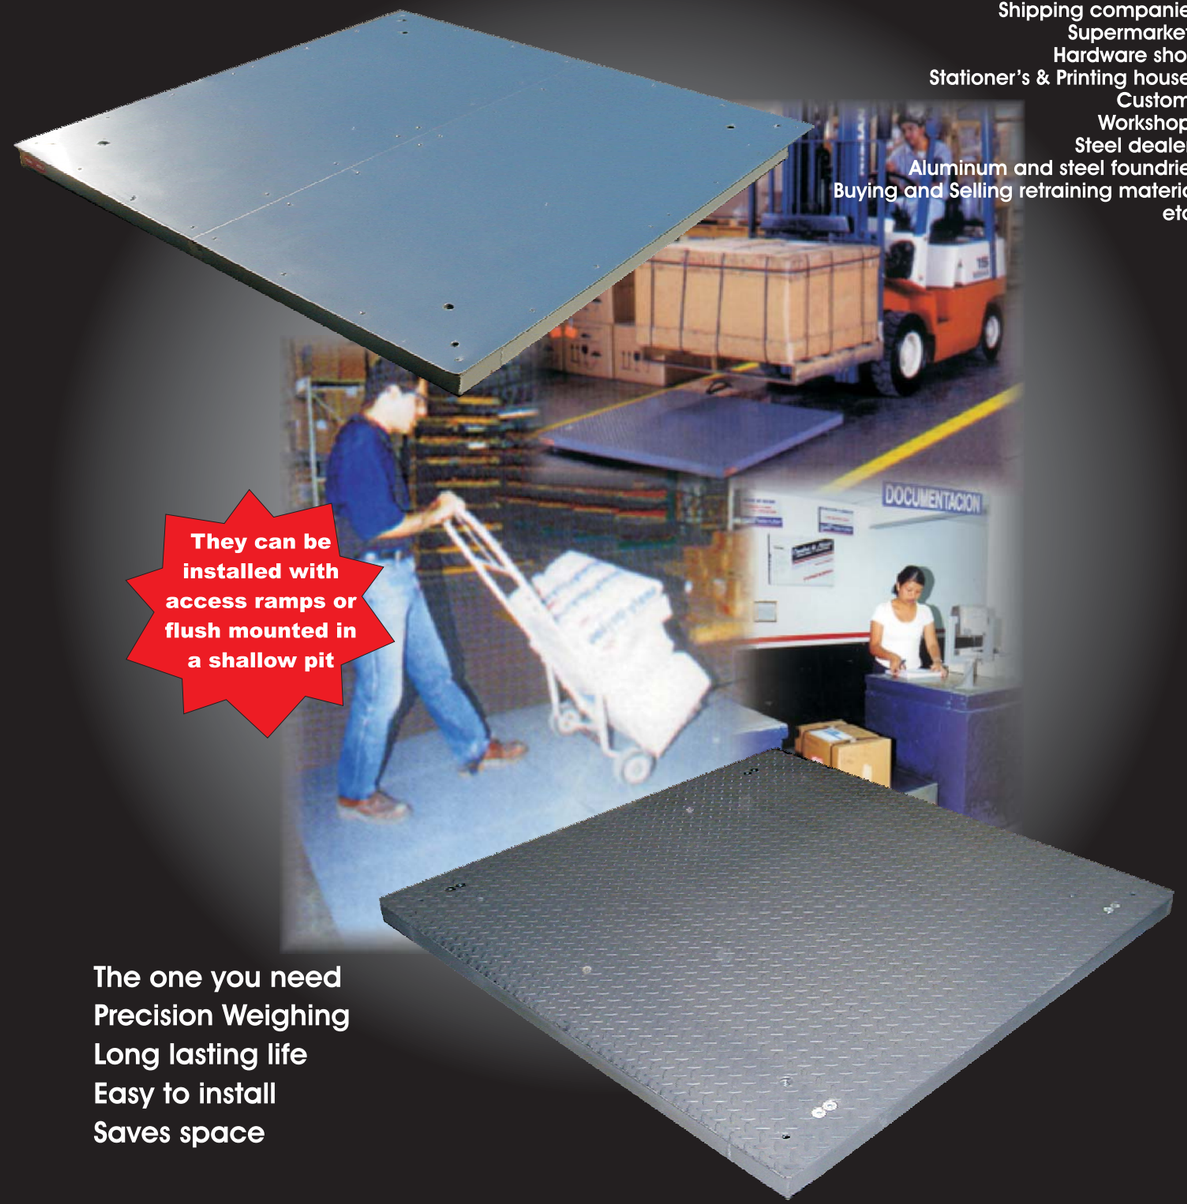

They can be installed with access ramps or flush mounted in a shallow pit

The one you need
Precision Weighing
Long lasting life
Easy to install
Saves space

The one you need:

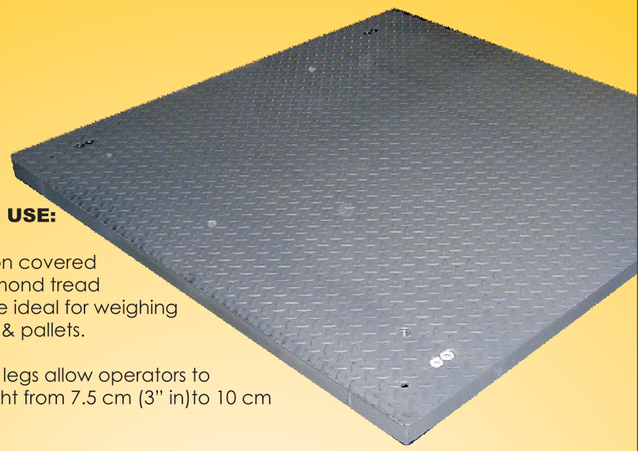

GENERAL USE:
Solid steel construction covered with a diamond tread safety plate ideal for weighing containers & pallets.

Adjustable legs allow operators to adjust height from 7.5 cm (3" in)to 10 cm (4" IN)

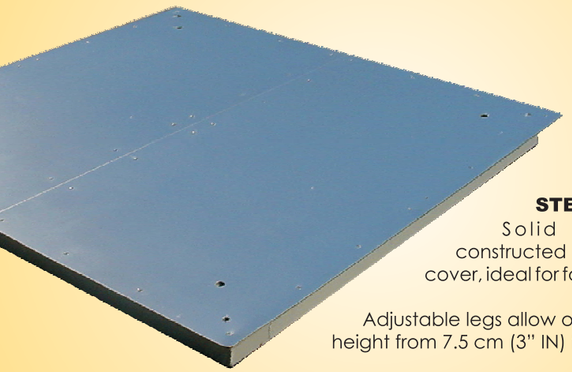

STAINLESS STEEL COVER(- AI) :
Solid steel structure constructed with Stainless steel cover, ideal for food operations.

Adjustable legs allow operators to adjust height from 7.5 cm (3" IN) to 10 cm (4" IN)

SPILL PROOF (-W):

Totally Stainless steel construction, Ideal to weigh fish, sea food, chemical products that are highly corrosive.

Sensors are protected against humidity and can be installed outside because its a washdown model.

Adjustable legs allow operators to adjust height from 7.5 cm (3" IN) to 10 cm (4" IN)

EASY TO INSTALL

TORREY platforms don´t need any additional accesories to be installed.
You will receive a platform ready to operate, and you only need to connect the indicator you have choosen. That's it!.

PRACTICAL AND EASY TO INSTALL

They can be installed with access ramps or flush mounted in a shallow pit

Access ramps reducing efforts

Flush mounted in a shallow pit, providing more free space.

SOLID CONSTRUCTION

The steel channel-frame design provides strength and protection to the load cell, cable and junction box.

TRUSTWORTHY WEIGHS

5,000 divisions load cells, steel constructed and junction box is hermetically sealed to protect it against humidity.

ADJUSTABLE LEGS

Features 4 adjustable legs to give more stability in each weighing application.

Heavy duty steel construction provides protection against overload and impact forces because its shock-absorbing platform.

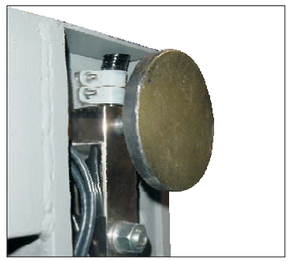

CHOOSE THE ONE YOU NEED!

All platforms are compatible with all TORREY indicators, so you can choose the combination you need.

PI Model

Spill proof Indicator WI-W Model

Versatil & high precision PIQ Model